
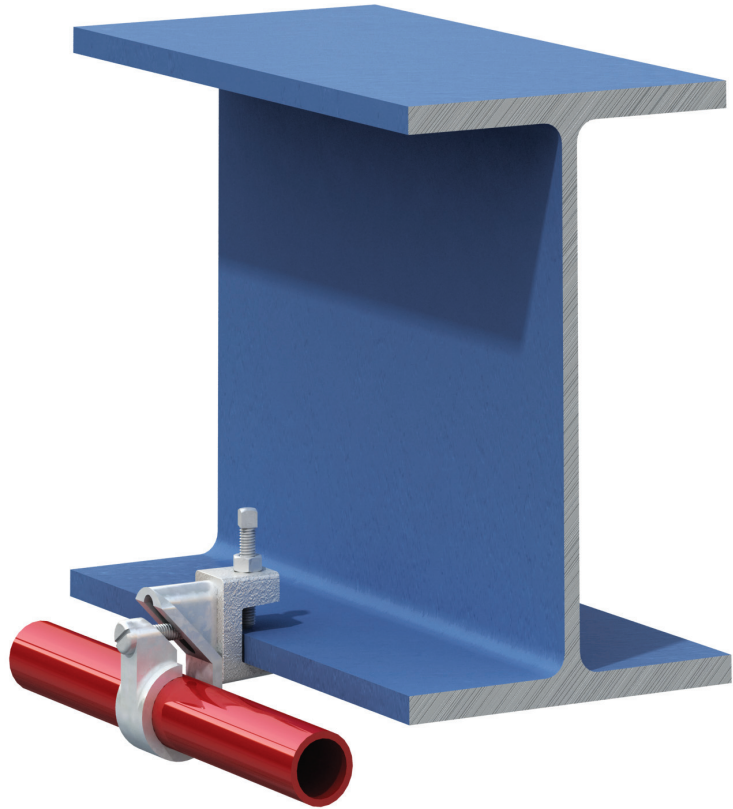
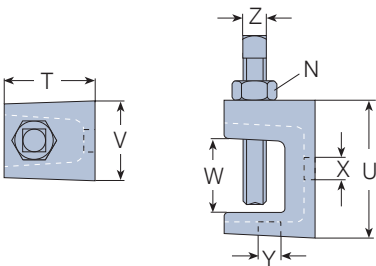


Type LC

Malleable iron, bright zinc plated

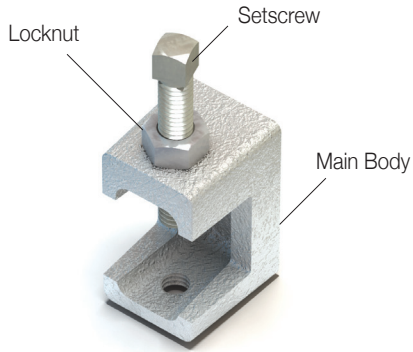

A flange clamp with tapped holes in position X and Y to accept threaded rod or cable clips. For parallel or tapered flanges. Supplied with a high tensile cup point setscrew.


➤ Installation see page 60 – Type FL

Product Code	Thread		Safe Working Load (4:1 Factor of Safety)		Clamping Thickness W mm	Setscrew Z	Tightening Torque		Dimensions		
	X	Y	Tensile / in Pos. X kN	Tensile / in Pos. Y kN			Setscrew Z Nm	Locknut N Nm	T mm	U mm	Width V mm
LC06	M6	M6	0.18	0.59	3 - 20	M6	4	4	25	36	21
LC08	M8	M8	0.18	0.59	3 - 20	M6	4	4	25	36	21


■ Order example: LC06

Type SW - Swivel Unit

High Grade Alloy Steel, bright zinc plated

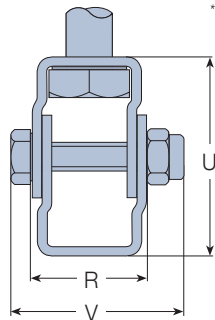

*Type FL and SW only

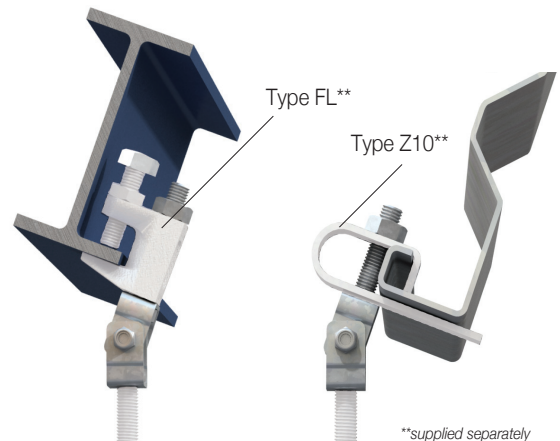

**supplied separately

Swivel unit for applications on inclined beams. Can be used with Type FL or Type Z10. Supplied complete with a Grade 8.8 M10 x 90 setscrew and nut.

Product Code	Rod	Safe Working Load (4:1 Factor of Safety)		Max. Inclination	Rotation	Tightening Torque Nm	Dimensions		
		Tensile kN	Max.				U mm	R mm	With Bolt Width V mm
SW10	M10	2.4	18°	360°	11	45	25	35	

■ Order example: SW10